


MAX-FAN 200 - 920

TECHNICAL DATASHEET

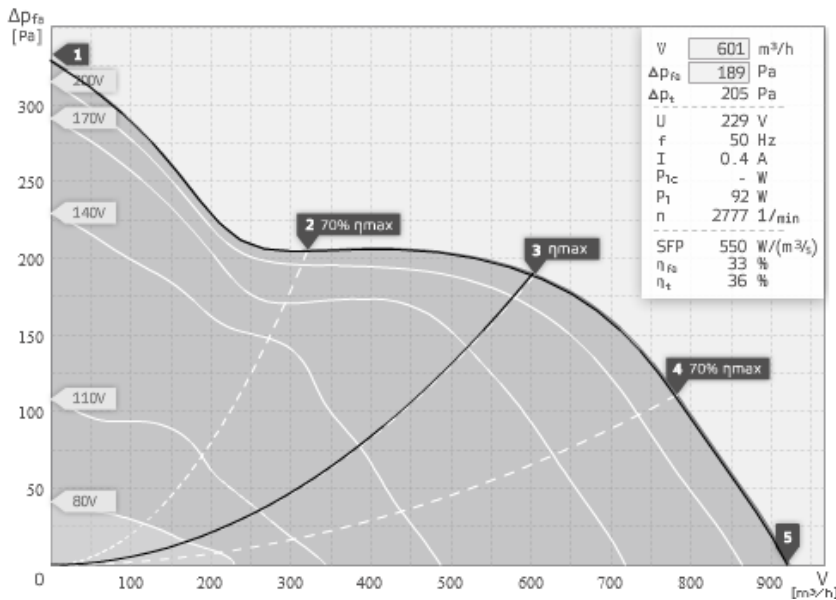

- Diagonal impeller with stator
- Plastic housing
- Speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,4	0,3	0,4	0,5	0,5
Power Consumption P1	W	80	77	92	100	103
RPM n	1/min	2845	2875	2779	2742	2720
SPL inlet LWA5	dB(A)	72	72	72	75	76
SPL outlet LWA6	dB(A)	76	75	76	75	78
SPL casing break out LWA2	dB(A)	62	61	60	59	61

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	72	33	46	58	64	69	66	61	52
Outlet	LWA6	75	36	48	58	65	73	70	63	55
Casing	LWA2	60	36	35	48	50	54	57	49	45

EL 200 E2 01 | 116527

Voltage UN	230 V 1~
Current Imax	0,5
Ambient Temperature tA	45 °C
Medium Temperature tM	45 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	2,9 kg

