


# MAX-FAN 400 - 3440

## TECHNICAL DATASHEET

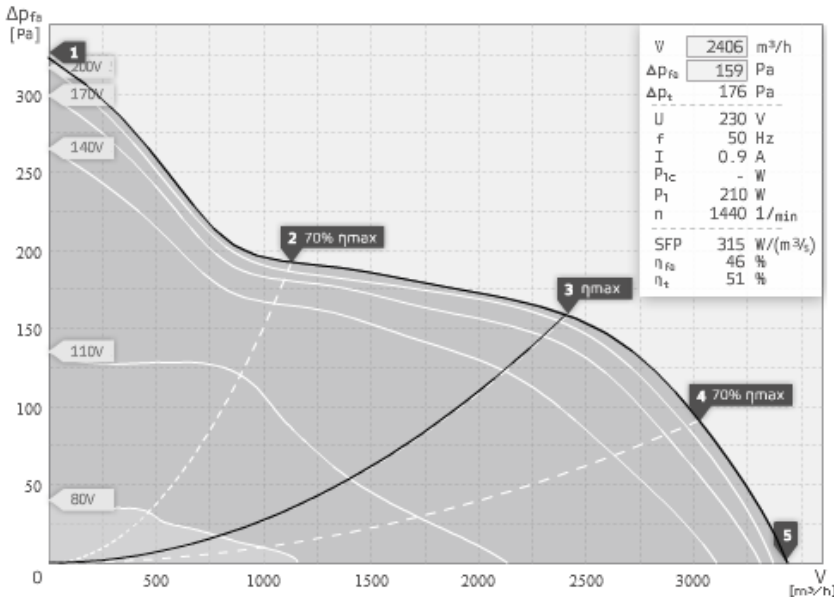

- Diagonal impeller with stator
- Casing of aluminium
- Speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,9	0,8	0,9	0,9	0,9
Power Consumption P1	W	197	169	211	214	195
RPM n	1/min	1443	1454	1440	1440	1448
SPL inlet LWA5	dB(A)	76	74	70	73	75
SPL outlet LWA6	dB(A)	80	78	75	77	78
SPL casing break out LWA2	dB(A)	65	63	61	63	63

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	70	-	49	56	67	64	63	57	47
Outlet	LWA6	74	-	60	60	71	70	65	60	49
Casing	LWA2	61	-	48	44	58	57	49	48	37

EL 400 E4 01 | 119380

Voltage UN	230 V 1~
Current Imax	1,5
Ambient Temperature tA	80 °C
Medium Temperature tM	80 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	12,8 kg

